



Freeze Dryer

12N-60A

- Green refrigerant is used
- High refrigeration efficiency
- Touch screen is adopted for intuitive display



Interface Display

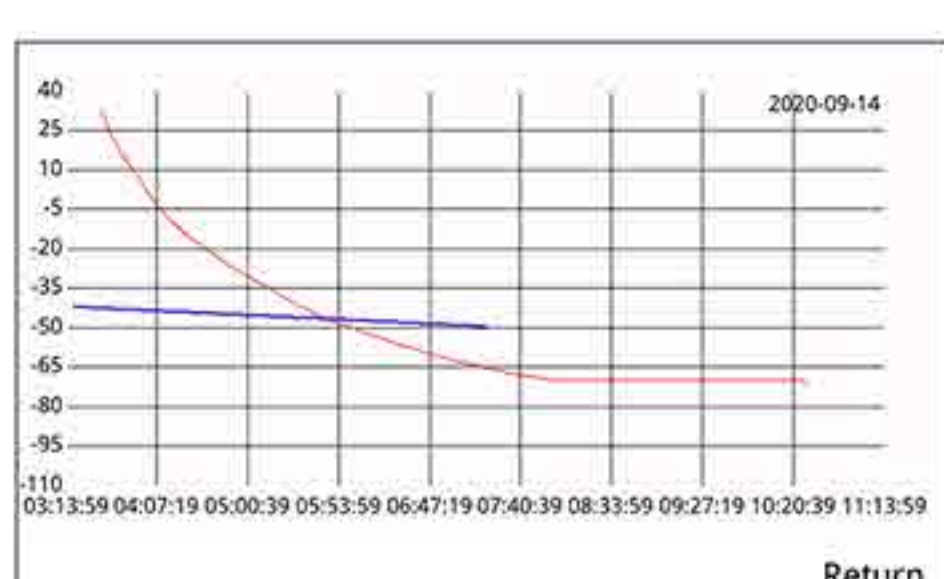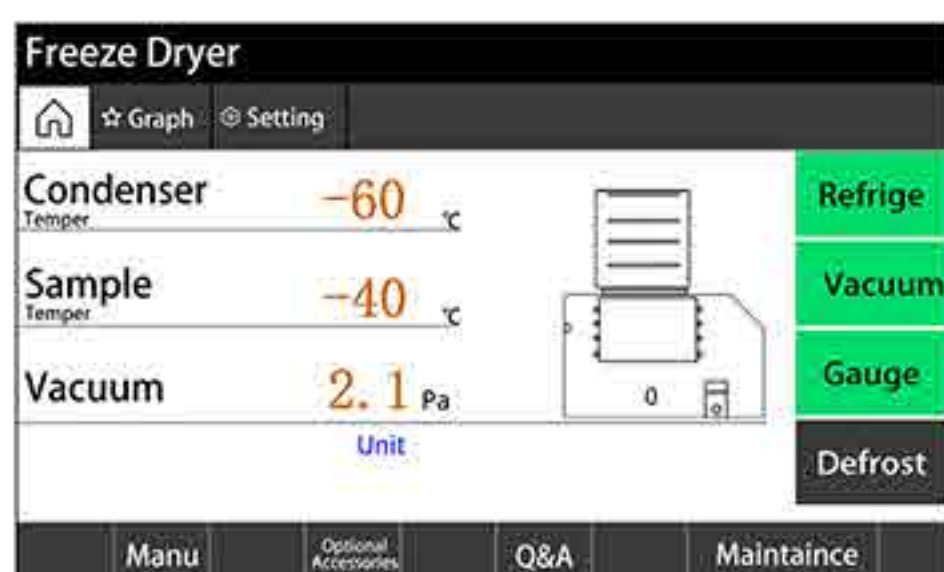

Advantage

- Regenerator**
- Freeze-Drying Data Curve Recording**
- The Cold Trap Temperature Can Be Set**
- Transducer/Sensor Can be used to measure the sample temperature**

Freeze-dried Products



Product Introduction

A variety of options available

- Digital Control
- Source Factory
- Technical Support
- Support for Custom

Product Display

Products are environmentally friendly and efficient



Product Details



Product Specifications

Model	12N-60A (Basic)	12N-60B (Top-press)	12N-60C (Multi-pipeline)	12N-60D (Top-press & Multi-pipeline)
Drying area(m ²)	0.12	0.092	0.12	0.092
Tray size(mm)	200*4	200*3	200*4	200*3
Tray capacity(L)	1.5	1	1.5	1
Condenser no-load temperature(°C)	< -60 (-50 optional)			
Vacuum(Pa)	<10			
Distance between trays(mm)	70			
Valis number for reference	260	185	260	165
	480	285	480	285
	920	560	920	500
Ability to capture water(Kg)	4			
Voltage(V/Hz)	220V/50Hz			
Power(W)	950			
Main host size(mm)	420*550*700			

Other Models Display

